

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
10 October 2002 (10.10.2002)

PCT

(10) International Publication Number  
**WO 02/080518 A2**

- (51) International Patent Classification<sup>7</sup>: **H04N**
- (21) International Application Number: **PCT/CA02/00436**
- (22) International Filing Date: **28 March 2002 (28.03.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
09/823,646      30 March 2001 (30.03.2001)      **US**
- (71) Applicant (for all designated States except US): **VIXS SYSTEMS INC.** [CA/CA]; 2235 Sheppard Avenue East, Suite 1705, Toronto, Ontario M2J 5B5 (CA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LAKSONO, Indra** [CA/CA]; 138 Old Hill Street, Richmond Hill, Ontario L4C 9Z7 (CA).

(74) Agent: **SMART & BIGGAR**; Attn: ZISCHKA, Matthew, 438 University Avenue, Suite 1500, Box 111, Toronto, Ontario M5G 2K8 (CA).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **ADAPTIVE BANDWIDTH FOOTPRINT MATCHING FOR MULTIPLE COMPRESSED VIDEO STREAMS IN A FIXED BANDWIDTH NETWORK**

ABFM State Machine 3 step escalation

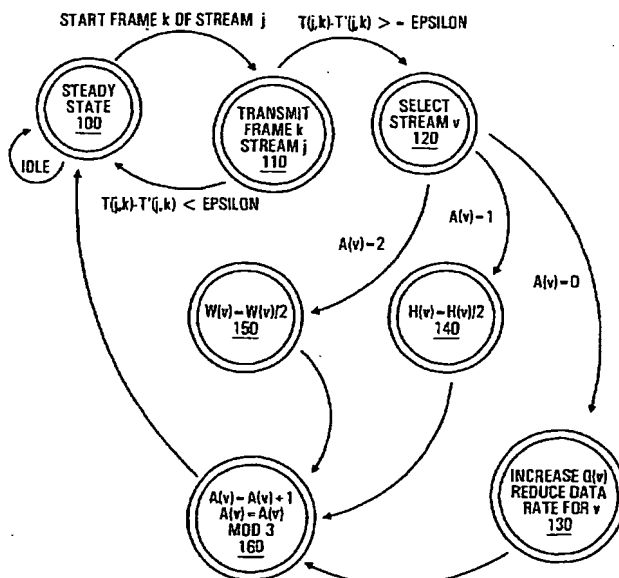

(57) Abstract: A system and a method for simultaneous transmission of multiple media streams in a fixed bandwidth network are disclosed herein. The system is comprised of a central gateway media server and a plurality of client receiver units. The input media streams arrive from an external source and are then transmitted to the client receiver units in a compressed format. A state machine on the gateway media server detects if the network bandwidth is close to saturation. In one embodiment, the potential bandwidth saturation is measured by matching the time when the start of unit of media for each stream against the estimated transmission time for that unit. When any one actual transmission time exceeds its estimated transmission time by a predetermined threshold value, the network is deemed to be close to saturation, or already saturated, and the state machine executes a process of selecting at least one stream as a target for lowering total bandwidth usage. Once the target stream associated with a client receiver unit is chosen, the amount of data transmitted by the target stream is reduced, which could result in a lower data transmission rate. In one embodiment, the amount of data is reduced by a gradual degradation of the precision of the data, resulting in a greater potential for data compression, and/or by gradually reducing the resolution of the data of the target stream.

WO 02/080518 A2

BEST AVAILABLE COPY

**WO 02/080518 A2**



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 02/080518

PCT/CA02/00436

## **ADAPTIVE BANDWIDTH FOOTPRINT MATCHING FOR MULTIPLE COMPRESSED VIDEO STREAMS IN A FIXED BANDWIDTH NETWORK**

### **FIELD OF THE DISCLOSURE**

The present invention relates generally to media data transmission and more  
5 particularly to reducing bandwidth overload.

### **BACKGROUND**

A number of media playback systems use continuous media streams, such as video  
image streams, to output media content. However, some continuous media streams in their  
raw form often require high transmission rates, or bandwidth, for effective and/or timely  
10 transmission. In many cases, the cost and/or effort of providing the required transmission rate  
is prohibitive. This transmission rate problem is often solved by compression schemes that  
take advantage of the continuity in content to create highly packed data. Compression  
methods such Motion Picture Experts Group (MPEG) methods and its variants for video are  
well known in the art. MPEG and similar variants use motion estimation of blocks of images  
15 between frames to perform this compression. With extremely high resolutions, such as the  
resolution of 1920x1080i used in high definition television (HDTV), the data transmission  
rate of such a video image stream will be very high even after compression.

One problem posed by such a high data transmission rate is data storage. Recording  
or saving high resolution video image streams for any reasonable length of time requires  
20 considerably large amounts of storage that can be prohibitively expensive. Another problem  
presented by a high data transmission rate is that many output devices are incapable of  
handling the transmission. For example, display systems that can be used to view video  
image streams having a lower resolution may not be capable of displaying such a high  
resolution. Yet another problem is the limitations on continuous media streaming in systems  
25 with a fixed bandwidth or capacity. For example, in a local area network with multiple  
receiving/output devices, such a network will often have a fixed bandwidth or capacity, and  
hence be physically and/or logistically incapable of simultaneously supporting multiple  
receiving/output devices.

WO 02/080518

PCT/CA02/00436

-2-

Given the limitations, as discussed, it is apparent that a method and/or system that overcome at least some of these limitations would be advantageous.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a state machine diagram illustrating an Adaptive Bandwidth Footprint  
5 Matching implementation according to at least one embodiment of the present invention;

FIG. 2 is a system diagram illustrating a server system for implementing Adaptive Bandwidth Footprint Matching according to at least one embodiment of the present invention;

FIG. 3 is a block diagram illustrating components of a gateway media server according to at least one embodiment of the present invention; and

10 FIG. 4 is a block diagram illustrating components of a receiver client unit according to at least one embodiment of the present invention.

### **DETAILED DESCRIPTION OF THE FIGURES**

In accordance with at least one embodiment of the present invention, a display data is received. It is determined if a predetermined criteria is met by a first representation of the  
15 display data, wherein the first representation of the display data includes a first plurality of display streams to be transmitted to a second plurality of display devices. A first display stream of the first plurality of display streams is compressed in a first manner when it is determined that the first representation of the display does not meet the predetermined criteria.

An advantage of the present invention is that networks for broadcasting of media streams are  
20 implemented more efficiently. Another advantage of the present invention is that multiple media streams may be transmitted to multiple users on a fixed bandwidth network by managing degradation in transmission quality.

FIGS. 1-4 illustrate a system and a method for transmission of multiple data streams in a network capable of supporting a fixed bandwidth. The system includes a central gateway  
25 media server and a plurality of client receiver units. The input data streams arrive from an external source, such as a satellite television transmission, or physical head end, and are transmitted to the client receiver units in a compressed format. The data streams can include display data, graphics data, digital data, analog data, multimedia data, and the like. An

WO 02/080518

PCT/CA02/00436

-3-

Adaptive Bandwidth Footprint Matching state machine on the gateway media server detects if the network bandwidth is close to saturation. The start time of each unit of media for each stream is matched against the estimated transmission time for that unit. When any one actual transmission time exceeds its estimated transmission time by a predetermined threshold, the network is deemed to be close to saturation, or already saturated, and the state machine will execute a process of selecting at least one stream as a target for lowering total bandwidth usage. Once the target stream associated with a client receiver unit is chosen, the target stream is modified to transmit less data, which may result in a lower data transmission rate. For example, a decrease in the data to be transmitted can be accomplished by a gradual escalation of the degree of data compression performed on the target stream, thereby reducing the resolution of the target stream. If escalation of the degree of data compression alone does not adequately reduce the data to be transmitted to prevent bandwidth saturation, the resolution of the target stream can also be reduced. For example, if the target stream is a video stream, the frame size could be scaled down, reducing the amount of data per frame, and thereby reducing the data transmission rate.

Referring now to FIG. 1, a state machine diagram of an Adaptive Bandwidth Footprint Matching (ABFM) method with three kinds of degradation is illustrated according to at least one embodiment of the present invention, where degradation is used to reduce amount of data and/or the data rate associated with a given data stream. Although the following discussion makes use of video streams for ease of illustration, other data formats, such as audio, display, analog, digital, multimedia, and the like, may be used in accordance with various embodiments. In steady state 100, each video stream of a plurality of video streams is operating within acceptable parameters. In at least one embodiment, a video stream is determined to be acceptably operating when the transmission of a frame of video data is transmitted without exceeding a maximum allowed delay time. For example, digital video streams such as MPEG often have time stamp information embedded within the stream. In addition to the start time  $T_0$  (when the frame was successfully transmitted) of the first frame in a sequence of frames with a fixed interframe time, this time stamp information, including the known interframe time (which is fixed for a sequence of frames), can be used to calculate the estimated times of each frame as they arrive. For example, in one embodiment, the estimated time of frame transmission completion  $T'_j$  for frame  $N$  is calculated as  $T'_j(N) = T_0 + N \cdot D$ , where  $D$  is the interframe time. In this case, if the estimated times for transmission

WO 02/080518

PCT/CA02/00436

-4-

of the start of each frame of a stream  $j$  is within acceptable limits and has not exceed a maximum allowed delay  $D_j$ , stream  $j$  can be considered as operating within acceptable parameters. The acceptable parameters may be set by an administrator, determined empirically, and the like.

5           The desired tolerance  $D_j$  (or maximum acceptable delay time) can be calculated using a variety of methods. In one embodiment, the method used is to take into consideration the buffering size of each client receiver unit, and ensure that the client receiver unit will not run out of media content to decode. A typical formula to calculate  $D_j$  is to take the size of the buffer and estimate a lower bound (in units of time) to consume, or fill, the buffer. As it is  
10 often desirable to keep the buffer of each client receiver unit as full as possible, a typical  $D_j$  will be calculated as  $D_j = T_j(\text{estimate})/2$ . Where  $T_j(\text{estimate})$  is the estimated lower time bound to completely consume the input buffer of a receiver unit associated with stream  $j$ . Alternately, instead of using  $1/2$  of  $T_j(\text{estimate})$ , a more aggressive approach would be to use  $3/4$  of  $T_j(\text{estimate})$ , and a more conservative approach might take  $1/3$  of  $T_j(\text{estimate})$ . In  
15 cases where  $T_j(\text{estimate})$  is small for receiver devices that are incapable of providing considerable buffer space, a conservative approach may be more appropriate. In one embodiment,  $T_j(\text{estimate})$  is obtained by taking observed peak (highest) data rate (in bytes/second) of stream  $j$  and the smallest size of the buffers (in bytes) of all the devices receiving stream  $j$ . In this case,  $T_j(\text{estimate})$  can be evaluated as  $B_p/R_p$ , where  $B_p$  is the  
20 receive buffer size of device  $p$  and  $R_p$  is the peak data rate of stream  $j$  associated with device  $p$ , where device  $p$  receives stream  $j$  and has the smallest receive buffer. Alternately,  $R_p$  can be associated with any value between the mean (average) and the peak. In one embodiment, the peak data rate ( $R_p$ ) can be based on the largest compressed frame. If the receiving client unit does not have enough buffering capability for at least one compressed frame then it is  
25 unlikely to be able to display the video smoothly without dropping frames.

At the commencement of each unit of media, such as a frame of video, the ABFM state machine transitions to state 110. In state 110, the actual transmit time  $T_j$  (the actual time of frame transmission completion) is compared against the estimated transmit time  $T'_j$  (the expected time of frame transmission completion) at the start of each frame of stream  $j$ . In one  
30 embodiment, if the actual time of frame transmission completion exceeds the estimated time by less than the desired tolerance  $D_j$  (i.e.  $T_j - T'_j < D_j$ ), the ABFM state machine returns to

WO 02/080518

PCT/CA02/00436

-5-

steady state 100. Otherwise, if the actual transmit time exceeds the estimated time by at least desired tolerance  $D_j$  (i.e.  $T_j - T'_j \geq D_j$ ), the ABFM state machine enters state 120.

In state 120, a victim stream  $v$  is selected from the plurality of video streams. In one embodiment, victim stream  $v$  is selected using a predetermined selection method, such as by  
5 round robin selection where each video stream is chosen in turn. In another embodiment, the victim stream  $v$  is selected based on a fixed priority scheme where lower priority streams are always selected before any higher priority scheme. In yet another embodiment, the victim stream  $v$  is selected based on a weighted priority scheme where the stream having the greatest amount of data and/or the priority of each stream plays a role in its probability of selection.

10 Regardless of the method of selecting a victim stream  $v$ , in one embodiment, each stream  $j$  has a count, herein referred to as  $A(j)$ , that refers to the current degradation value of the modified stream of stream  $j$ . In this case, the current degradation value of victim stream  $v$ ,  $A(v)$ , is evaluated in state 120. If  $A(v)$  is 0, in one embodiment, the one or more quantization factors of the reencoding process for the victim stream  $v$  are changed in state  
15 130, thus resulting in a decreased in the amount of data transmitted in victim stream  $v$ . In one embodiment, the quantization factors are increased resulting in a decrease in the amount of data transmitted in victim stream  $v$ . For example, the MPEG algorithm uses quantization factors to reduce the amount of data by reducing the precision of the transmitted video stream. MPEG relies on quantization of matrices of picture elements (pixels) or differences in values  
20 of pixels to obtain as many zero elements as possible. The higher the quantization factors, the more zero elements produced. Using algorithms such as run-length encoding, video streams (or their associated matrices) containing more zeros can be more highly compressed than video streams having fewer zeros.

For example, the MPEG algorithm for compression of a video stream has a stage in  
25 the algorithm for a discrete cosine transform (DCT), a special type of a Fourier Transform. The DCT is used to transform blocks of pixels in the time domain to the frequency domain. As a result of this transformation, the elements in the frequency domain, post-DCT, that are closest to the top left element of the resulting matrix with indices (0,0) are weighted more heavily compared to elements at the bottom right of the matrix. If the matrix in the frequency  
30 domain were to use less precision to represent the elements in the lower right half of the matrix of elements, the smaller values in the lower right half will get converted to zero if they

WO 02/080518

PCT/CA02/00436

-6-

are below a threshold based on a quantization factor. Dividing each element by a quantization factor is one method utilized to produce more zero elements. MPEG and related algorithms often apply larger quantization values to decrease the precision of the matrices in the frequency domain, resulting in more zero elements, and hence a decrease the data transmission rate.

After the reducing the data transmission of the victim stream  $v$  by modifying the quantization factor (state 130), in one embodiment, the ABFM state machine transitions to state 160, where the degradation value  $A(v)$  is increased by one and then a modulus of 3 is applied, i.e.  $A(v)_{\text{current}} = (A(v)_{\text{previous}} + 1) \bmod 3$ . As a result, the value of  $A(v)$  can cycle from 0 to 2. Since  $A(v)$  was previously determined to be 1 in state 120, the new  $A(v)$  value would be 1 ( $0+1 \bmod 3$ ). After modifying the degradation value  $A(v)$  for victim stream  $v$  in state 160, the ABFM state machine transitions back to state 100.

If  $A(v)$  is determined to be 1 for victim stream  $v$  in state 120, the ABFM state machine enters state 140. In one embodiment, the height of the reencoded data stream is reduced by a predetermined amount,  $\frac{1}{2}$  for example, in state 140, resulting in a decreased amount of data to be transmitted. One method used to scale blocks of pixels by half is to blend and average pixels. Another method used is to drop every other pixel. In cases where the video stream is interlaced, halving the height can be achieved by dropping alternate fields, such as dropping all of the odd horizontal display rows or all of the even horizontal display rows. It will be appreciated that in some formats, particularly those in the National Television System Committee (NTSC) and the Advanced Television System Committee (ATSC) formats, video streams are interlaced where the even horizontal display rows for an entire frame are displayed first and then the odd horizontal display rows are displayed next. In other embodiments, the height of the reencoded data stream is reduced by a factor other than a half, such as  $\frac{1}{3}$ , using similar methods as appropriate.

After the reducing the data transmission of the victim stream  $v$  by reducing the resolution of the stream (state 140), in one embodiment, the degradation value  $A(v)$  is modified in state 160, as discussed previously. The resulting value for  $A(v)$  is 2 ( $1+1 \bmod 3$ ). After modifying the degradation value  $A(v)$  for victim stream  $v$  in state 160, the ABFM state machine transitions back to state 100.



WO 02/080518

PCT/CA02/00436

-7-

If  $A(v)$  is determined to be 2 for victim stream  $v$  in state 120, the ABFM state machine enters state 150. In one embodiment, the width of the reencoded data stream is reduced by a predetermined amount in state 150 using methods similar to those discussed previously with reference to state 140, such as dropping every other pixel. It will be appreciated that for a same reduction factor, the reduction methods of state 140 or state 150 are interchangeable. In cases where the victim stream  $v$  is interlaced, halving the height before the width is generally more appropriate as it is more efficient to completely skip alternating fields, saving substantial processing requirements.

After the reducing the data transmission of the victim stream  $v$  by reducing the resolution of the stream (state 150), in one embodiment, the degradation value  $A(v)$  is modified in state 160, as discussed previously. The resulting value for  $A(v)$  is  $0 (2+1 \bmod 3)$ . After modifying the degradation value  $A(v)$  for victim stream  $v$  in state 160, the ABFM state machine transitions back to state 100.

In one embodiment, as a result of the cycling between 0 to 2 of the degradation value  $A(v)$  for a victim stream  $v$ , the ABFM state machine cycles through three different kinds of degradation of the resolution and/or the precision of victim stream  $v$  each time it is selected for degradation in state 120. Although an ABFM state machine utilizing three kinds of data degradation has been discussed, in other embodiments, fewer or more steps of data degradation may be used according to the present invention. For example, in one embodiment, an ABFM state machine utilizes multiple step degradation involving more than one state of changing of quantization factors. It will also be appreciated that scaling factors of width and height other than  $1/2$  (e.g.:  $3/4$ ) may be used. For example, in one embodiment, the amount by which the resolution and/or precision of a victim stream  $v$  is based on the degree to which the actual frame transmission completion time for a frame of video in victim stream  $v$  exceeds the estimated frame transmission completion time. For example, if the actual frame transmission completion time is 10% greater than the estimated frame transmission completion time, then the resolution of victim stream  $v$  could be scaled down by 10%, thereby causing the actual frame transmission completion time to likely come closer to the estimated frame transmission completion time.

Referring next to FIG. 2, Adaptive Bandwidth Footprint Matching (ABFM) server system 205 is illustrated according to at least one embodiment of the present invention. Data

WO 02/080518

PCT/CA02/00436

-8-

streams, such as video data, display data, graphics data, MPEG data, and the like, are input to gateway media server 210. In one embodiment, two main inputs sources are used by gateway media server 210. One input is wide area network (WAN) connection 200 to provide high speed Internet access. The other input is a source of media streams, such as satellite television (using satellite dish 201) or cable television. In other embodiments, other input sources can be used, such as a local area network (LAN). WAN connection 200 and/or other used input sources which can include a network comprised of cable, twisted pair wires, fiber optic cable, a wireless radio frequency network, and the like.

Gateway media server 210, in one embodiment, accepts one or more input data streams, such as digital video or display data, from satellite dish 201 and/or WAN 200. Each input data stream can include a plurality of multiplexed channels, such as MPEG data channels. Gateway media server 210 broadcasts the data streams and/or channels over a common medium (local data network 220) to one or more receiving client units, such as laptop 230, computer 240, or viewing unit 250. In one embodiment, there is a one-to-one correspondence between the number of data channels input to gateway media server 210 and the number of client receiver units to receive output data channels or streams. In another embodiment, there are fewer data channels or streams than there are receiver client units. In this case, two or more client receiver units may need to share one or more data channels or streams. Local data network 220 can include a local area network, a wide area network, a bus, a serial connection, and the like. Local data network 220 may be constructed using cable, twisted pair wire, fiber optic cable, etc. During broadcast of the data streams to the receiving client units, gateway media server 210, in one embodiment, applies the ABFM algorithm, as discussed previously with reference to FIG. 1, to manage the network traffic to assure consistent and sustained delivery within acceptable parameters, thereby allowing users to view the data stream seamlessly.

In at least one embodiment, the ABFM algorithm is utilized by gateway media server 210 to attempt to ensure that a representation of the display data meets a predetermined criteria. For example, gateway media server 210 may transmit the display data to receiver client units, where a video sequence displayed on the receiver client units is a representation of the displayed data. If the video sequence is simultaneously displayed properly in real time (the predetermined criteria) on a number receiver client units, gateway media server 210 may not need to take further action. Else if the video sequence is choppy, is not synchronized, is

WO 02/080518

PCT/CA02/00436

-9-

delayed, or is not received by all the designated receiver client units, the representation of the display data does not meet the predetermined criteria, and gateway media server 210, in one embodiment, uses the ABFM method previously discussed to modify one or more of the data streams of display data to improve the display of the video sequence.

5           As discussed previously, in at least one embodiment, an ABFM algorithm is implemented to maintain the data transmission rate of ABFM server system 205 within a fixed bandwidth. In one embodiment, the bandwidth of ABFM server system 205 is fixed by the maximum bandwidth of the transmission medium (local data network 225) between gateway media server 210 and the client receiver units (laptop 230, computer 240, or viewing  
10   unit 250). For example, if local data network is a local area network having a maximum transmission rate of 1 megabit per second, the bandwidth of ABFM server system 205 may be fixed at a maximum of 1 megabit per second. Alternately, in another embodiment, the bandwidth of ABFM server system 205 could be a predetermined portion of the available bandwidth of the transmission medium (local data network 225). For example, if there are  
15   four ABFM server systems 205 connected to local data network 225 having a maximum transmission rate of 1 megabit per second, each ABFM server systems 205 could be predetermined to have a fixed bandwidth of 0.25 megabits per second (one fourth of the maximum available transmission rate).

          Although the transmission medium between gateway media server 210 and client  
20   receiver units is often the factor which limits or fixes the bandwidth of ABFM server system 205, in one embodiment, the bandwidth of ABFM server system 205 is fixed by the rate at which gateway media server 205 is able to input one or more data streams, compress one or more of the data streams, and output the compressed (and uncompressed) data streams or channels to the client receiver units. For example, if gateway media server 205 can only  
25   process 1 megabits of data per second, but local data network 225 has a transmission rate of 10 megabits per second, the bandwidth of ABFM server system 205 may be limited to only 1 megabits per second, even though local data network 225 can transmit at a higher transmission rate. It will be appreciated that the bandwidth of ABFM server system 205 could be limited by other factors without departing from the spirit or the scope of the present  
30   invention.

WO 02/080518

PCT/CA02/00436

- 10 -

Referring to FIG. 3, gateway media server 210 is illustrated in greater detail according to at least one embodiment of the present invention. Input media streams enter the system via digital tuner demultiplexors (DEMUX) 330, from which the appropriate streams are sent to ABFM transcoder controller circuit 350. ABFM transcoder controller circuit 350, in one embodiment, includes one or more stream parsing processors 360 that perform the higher level tasks of digital media decoding, such as video decoding. Stream parsing processors 360 drive a series of media transcoding vector processors 390 that perform the low level media transcoding tasks. The intermediate and final results of the decoding and transcoding are stored in the device memory, such as dynamic random access memory (DRAM) 380. The final compressed transcoded data, in one embodiment, is transmitted according to a direct memory access (DMA) method via external system input/output (IO) bus 320 past north bridge 305 into the host memory (host DRAM 310). Processor 300, using a timer driven dispatcher, at an appropriate time, will route the final compressed transcoded data stored in host DRAM 310 to network interface controller 395, which then routes the data to local area network (LAN) 399.

Referring next to FIG. 4, receiver client unit 401 is illustrated according to at least one embodiment of the present invention. Receiver client unit 401 can include devices capable of receiving and/or displaying media streams, such as laptop 230, computer 240, and viewing unit 250 (FIG. 2). The final compressed transcoded data stream as discussed with reference to FIG. 3 is transmitted to network interface controller 400 via LAN 399. The data stream is then sent to media decoder/renderer 420 via IO connect 410. IO connect 410 can include any IO connection method, such as a bus or a serial connection. Media decoder/renderer 420, in one embodiment, includes embedded DRAM 430 which can be used as an intermediate storage area to store the decoded data. In cases where the decoded data does not fit within embedded DRAM 430, media decoder/renderer 420 further includes DRAM 440 which is larger than embedded DRAM 430. As the compressed data is decoded, it is transmitted to receiver client IO bus 490 and eventually is picked up by the receiver client unit's host processor (not shown). In one embodiment, the host processor controls video decoder/renderer 420 directly and actively reads the rendered data. In other embodiments, the functions of video decoder/renderer 420 are performed on the host via a software application. In cases where the host processor is incapable of such decoding tasks, video decoder/renderer 420 performs part of or all of the decoding tasks.

WO 02/080518

PCT/CA02/00436

- 11 -

One implementation of the invention is as sets of computer readable instructions resident in the random access memory of one or more processing systems configured generally as described in FIGS. 1-4. Until required by the processing system, the set of instructions may be stored in another computer readable memory, for example, in a hard disk drive or in a removable memory such as an optical disk for eventual use in a CD drive or DVD drive or a floppy disk for eventual use in a floppy disk drive. Further, the set of instructions can be stored in the memory of another image processing system and transmitted over a local area network or a wide area network, such as the Internet, where the transmitted signal could be a signal propagated through a medium such as an ISDN line, or the signal may be propagated through an air medium and received by a local satellite to be transferred to the processing system. Such a signal may be a composite signal comprising a carrier signal, and contained within the carrier signal is the desired information containing at least one computer program instruction implementing the invention, and may be downloaded as such when desired by the user. One skilled in the art would appreciate that the physical storage and/or transfer of the sets of instructions physically changes the medium upon which it is stored electrically, magnetically, or chemically so that the medium carries computer readable information.

In the preceding detailed description of the figures, reference has been made to the accompanying drawings which form a part thereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical, chemical and electrical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the invention, the description may omit certain information known to those skilled in the art. Furthermore, many other varied embodiments that incorporate the teachings of the invention may be easily constructed by those skilled in the art. Accordingly, the present invention is not intended to be limited to the specific form set forth herein, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents, as can be reasonably included within the spirit and scope of the invention. The preceding detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

WO 02/080518

PCT/CA02/00436

- 12 -

**WHAT IS CLAIMED IS:**

- 1    1.    A method comprising the steps of:  
2        receiving a display data;  
3        determining if a predetermined criteria is met by a first representation of the display  
4                data, wherein the first representation of the display data includes a first  
5                plurality of display streams to be transmitted to a second plurality of display  
6                devices;  
7        compressing, in a first manner, a first display stream of the first plurality of display  
8                streams when it is determined that the first representation of the display data  
9                does not meet the predetermined criteria.
- 1    2.    The method of claim 1, wherein the step of determining further includes providing  
2        the display streams to the second plurality of display devices using a common  
3        medium.
- 1    3.    The method of claim 2, wherein the common medium is part of a local area network.
- 1    4.    The method of claim 3, wherein a physical medium of the local area network  
2        includes cable.
- 1    5.    The method of claim 3, wherein a physical medium of the local area network  
2        includes twisted pair wires.
- 1    6.    The method of claim 3, wherein a physical medium of the local area network  
2        includes optical fiber.
- 1    7.    The method of claim 3, wherein the common medium includes wireless Radio  
2        Frequency.
- 1    8.    The method of claim 2, wherein the common medium is part of a wide area network.

WO 02/080518

PCT/CA02/00436

- 13 -

- 1 9. The method of claim 1, wherein the predetermined criteria is determined to be met  
2 when it is expected that each display stream of the first plurality of display streams  
3 can be transmitted in a manner allowing for real time simultaneous display of each  
4 of the first plurality of display streams.
- 1 10. The method of claim 9, wherein the step of determining further includes:  
2 determining if an actual transmission time of a frame of data for a first display  
3 stream of the plurality of display streams matches a first predicted  
4 transmission time.
- 1 11. The method of claim 10, wherein the step of determining further includes:  
2 determining, for each display stream in the first plurality of display streams, whether  
3 an actual transmission time for a video frame matches a predicted  
4 transmission time within a predetermined tolerance.
- 1 12. The method of claim 9, wherein the step of determining further includes:  
2 determining, for each display stream in the first plurality of display streams, whether  
3 an actual transmission time for a video frame matches a predicted  
4 transmission time.
- 1 13. The method of claim 1, wherein there is a one-to-one correspondence between  
2 display streams in the first plurality of display streams and display devices in the  
3 second plurality of display devices.
- 1 14. The method of claim 1, wherein there are fewer display streams in the first plurality  
2 of display streams than display devices in the second plurality of display devices,  
3 where at least one stream in the first plurality of display streams is shared by two  
4 or more display devices in the second plurality of display devices.

WO 02/080518

PCT/CA02/00436

- 14 -

1 15. The method of claim 1, wherein the step of receiving further includes the display  
2 data being video data.

1 16. The method of claim 1, wherein the step of receiving further includes the display  
2 data being graphics data.

1 17. The method of claim 1, wherein the step of receiving further includes the display  
2 data being digital data.

1 18. The method of claim 1, wherein the step of receiving further includes the display  
2 data being analog data.

1 19. The method of claim 1, wherein the display data further includes display data from  
2 a plurality of sources.

1 20. The method of claim 1, wherein the step of receiving further includes receiving at  
2 least a portion of the display data from a digital data stream having a plurality of  
3 multiplexed channels.

1 21. The method of claim 20, wherein the digital data stream having a plurality of  
2 multiplexed channels is an MPEG data stream.

1 22. The method of claim 1, wherein the step of determining includes:  
2 determining if the predetermined criteria is met when the first plurality of display  
3 streams is to be transmitted to the second plurality of display devices using  
4 a fixed bandwidth.

1 23. The method of claim 22, wherein the fixed bandwidth is the maximum bandwidth  
2 of the transmission medium.



WO 02/080518

PCT/CA02/00436

- 15 -

- 1 24. The method of claim 22, wherein the fixed bandwidth is a predetermined portion of  
2 the available bandwidth of the transmission medium.
- 1 25. The method of claim 22, wherein the fixed bandwidth is the maximum bandwidth  
2 of a processing device that performs the step of compressing medium.
- 1 26. The method of claim 1 further comprising the step of:  
2 selecting the first display steam from the first plurality of display streams using a  
3 predefined selection method.
- 1 27. The method of claim 26, wherein the predefined selection method includes using a  
2 round robin method.
- 1 28. The method of claim 26, wherein the predefined selection method includes selecting  
2 a display stream of the plurality of display streams having a greatest amount of data.
- 1 29. The method of claim 26, wherein the step of selecting is based on a prioritization  
2 of one or more of the display streams associated with the plurality of display  
3 streams.
- 1 30. The method of claim 26, wherein the step of selecting the first display stream is  
2 based upon a previous compression of a display stream in the first plurality of  
3 display streams.
- 1 31. The method of claim 1, wherein the step of compressing includes:  
2 compressing in the first manner when it is determined the first display stream is has  
3 not been previously compressed;  
4 compressing in a second manner when it is determined that the first display stream  
5 has been previously compressed in the first manner.

WO 02/080518

PCT/CA02/00436

- 16 -

- 1    32.    The method of claim 31, wherein the step of compressing further includes:  
2            compressing in a third manner when it is determined that the first display stream has  
3            been previously compressed in the second manner.
- 1    33.    A method comprising the steps of:  
2            determining, for each display stream of a plurality of display streams, if an  
3            estimated transmit time meets an actual transmit time within a desired  
4            tolerance, if not, there is too much data being transmitted;  
5            selecting a first stream of the plurality of display streams based on a prioritization  
6            method;  
7            selecting one of a plurality of compression methods to be applied to the first stream;  
8            repeating each of the above steps until the step of determining indicates the actual  
9            transmit time is within the desired tolerance of the estimated transmit time.
- 1    34.    The method of claim 33, wherein the desired tolerance is based on a desired  
2            transmission rate to provide real time simultaneous display of each of the plurality  
3            of display streams.
- 1    35.    The method of claim 33, wherein one of the plurality of compression methods  
2            includes reducing the precision of the first display stream.
- 1    36.    The method of claim 33, wherein one of the plurality of compression methods  
2            includes reducing the resolution of the first display stream.
- 1    37.    A method comprising the steps of:  
2            receiving a multimedia data stream having a plurality of multimedia channels;  
3            determining, for each multimedia channel in the multimedia data stream, whether  
4            an actual transmission time for a multimedia channel matches a predicted  
5            transmission time within a predetermined tolerance;  
6            selecting, using a predefined selection method, a first multimedia channel;

WO-02/080518

PCT/CA02/00436

- 17 -

7       reducing an amount of data to be transmitted associated with the first multimedia  
8       channel when it is determined actual transmission time of the first  
9       multimedia channel exceeds the predicted transmission time by an amount  
10      greater than the predetermined tolerance.

1   38.   The method as in claim 37, wherein the predefined selection method includes a  
2       round robin method.

1   39.   The method as in claim 37, wherein the step of reducing includes reducing the  
2       precision of the data transmitted by the first multimedia channel.

1   40.   The method as in claim 37, wherein the step of reducing includes reducing the  
2       resolution of the data transmitted by the first multimedia channel.

1   41.   The method as in claim 37, wherein the multimedia data stream includes MPEG  
2       data.

1   42.   A system comprising:  
2       a data processor;  
3       memory operably coupled to said processor; and  
4       a program of instructions capable of being stored in said memory and executed by  
5       said processor, said program of instruction to manipulate said processor to:  
6       receive a display data;  
7       determine if a predetermined criteria is met by a first representation of the  
8       display data, wherein the first representation of the display data  
9       includes a first plurality of display streams to be transmitted to a  
10      second plurality of display devices;  
11      compress, in a first manner, a first display stream of the first plurality of  
12      display streams when it is determined that the first representation of  
13      the display data does not meet the predetermined criteria.

WO 02/080518

PCT/CA02/00436

- 18 -

- 1    43.    A computer readable medium tangibly embodying a program of instructions to  
2           manipulate a data processor to:  
3           receive a display data;  
4           determine if a predetermined criteria is met by a first representation of the display  
5           data, wherein the first representation of the display data includes a first  
6           plurality of display streams to be transmitted to a second plurality of display  
7           devices;  
8           compress, in a first manner, a first display stream of the first plurality of display  
9           streams when it is determined that the first representation of the display data  
10          does not meet the predetermined criteria.

WO 02/080518

PCT/CA02/00436

1/4

## ABFM State Machine 3 step escalation

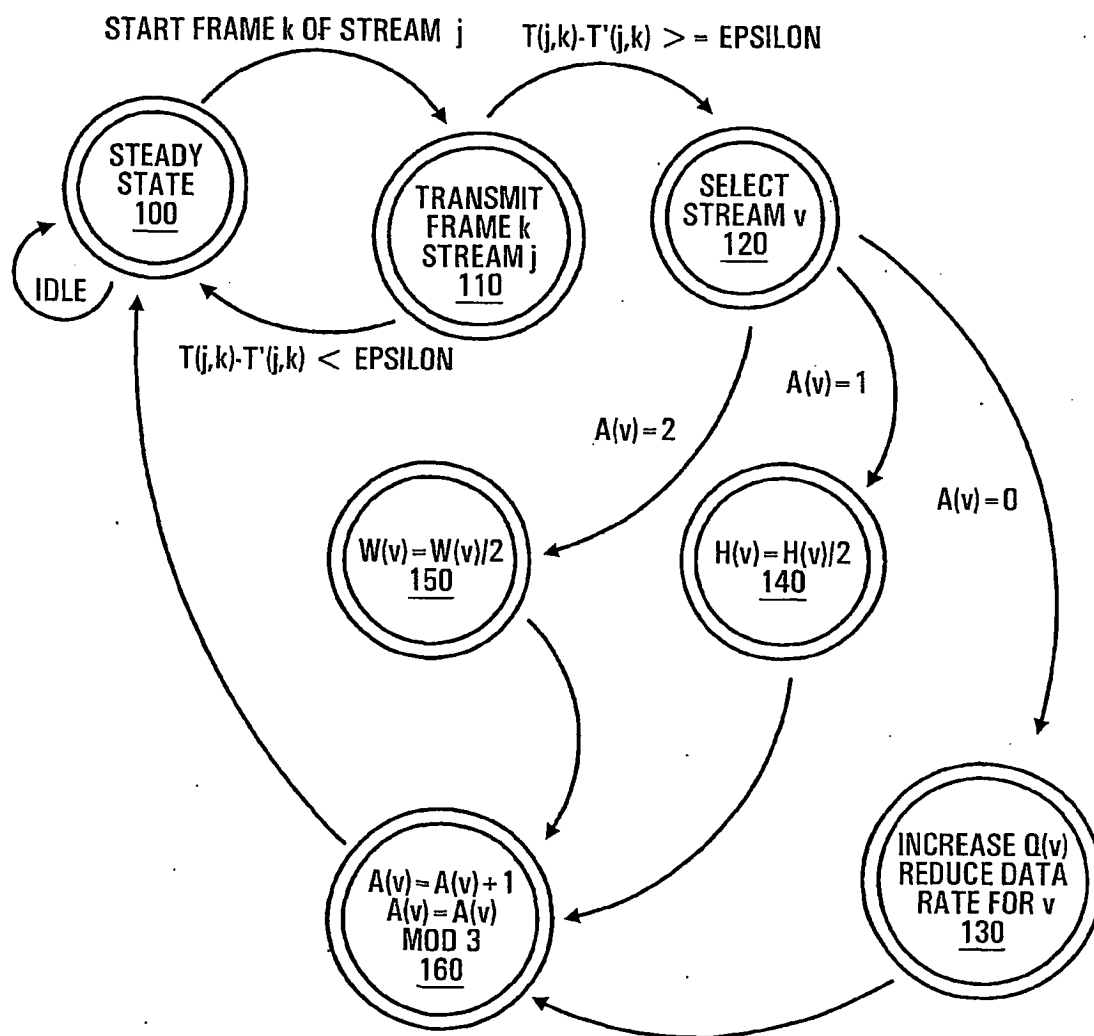


FIG. 1

WO 02/080518

PCT/CA02/00436

2/4


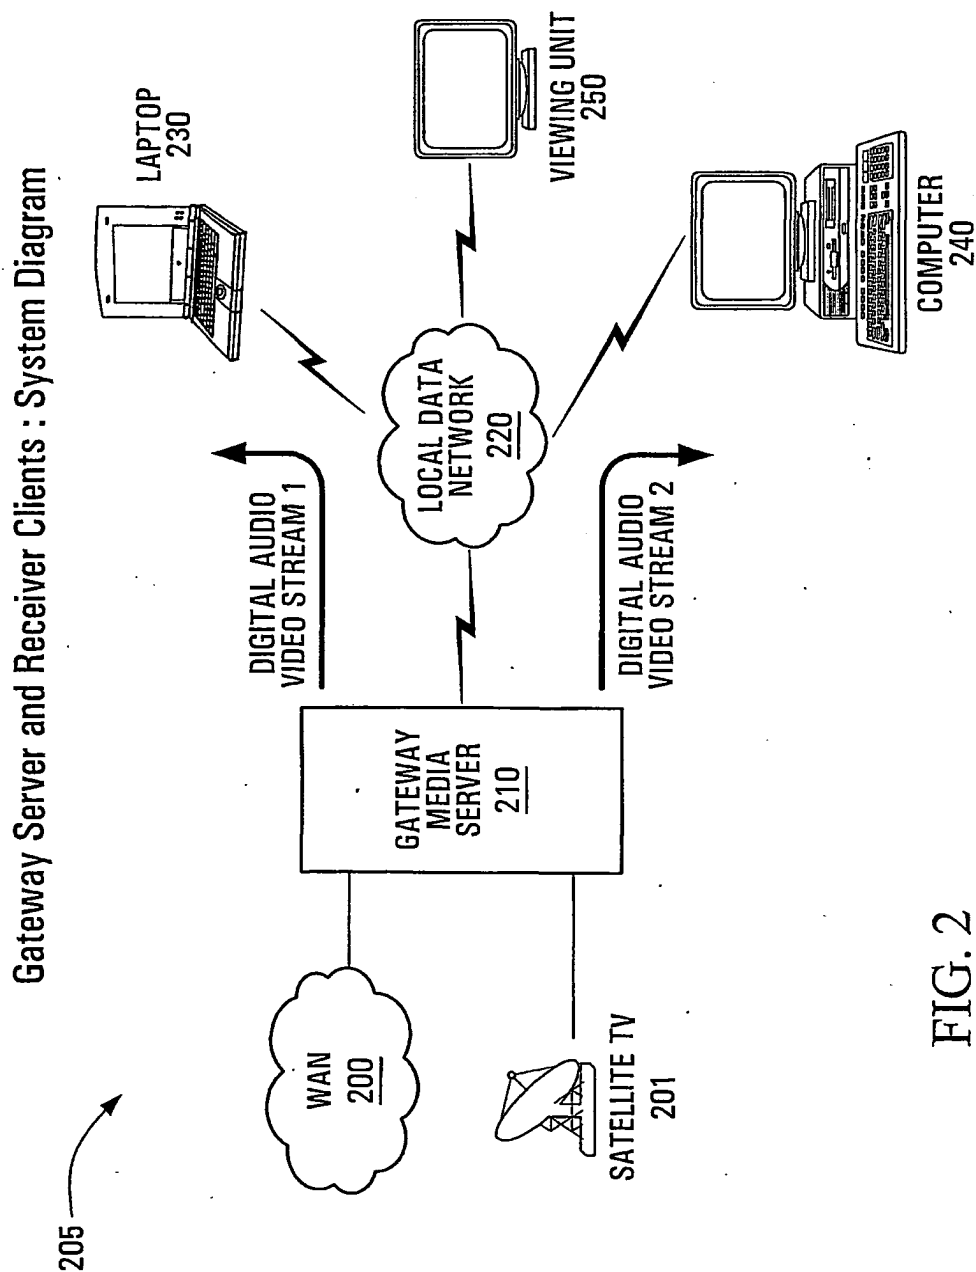


FIG. 2

WO 02/080518

PCT/CA02/00436

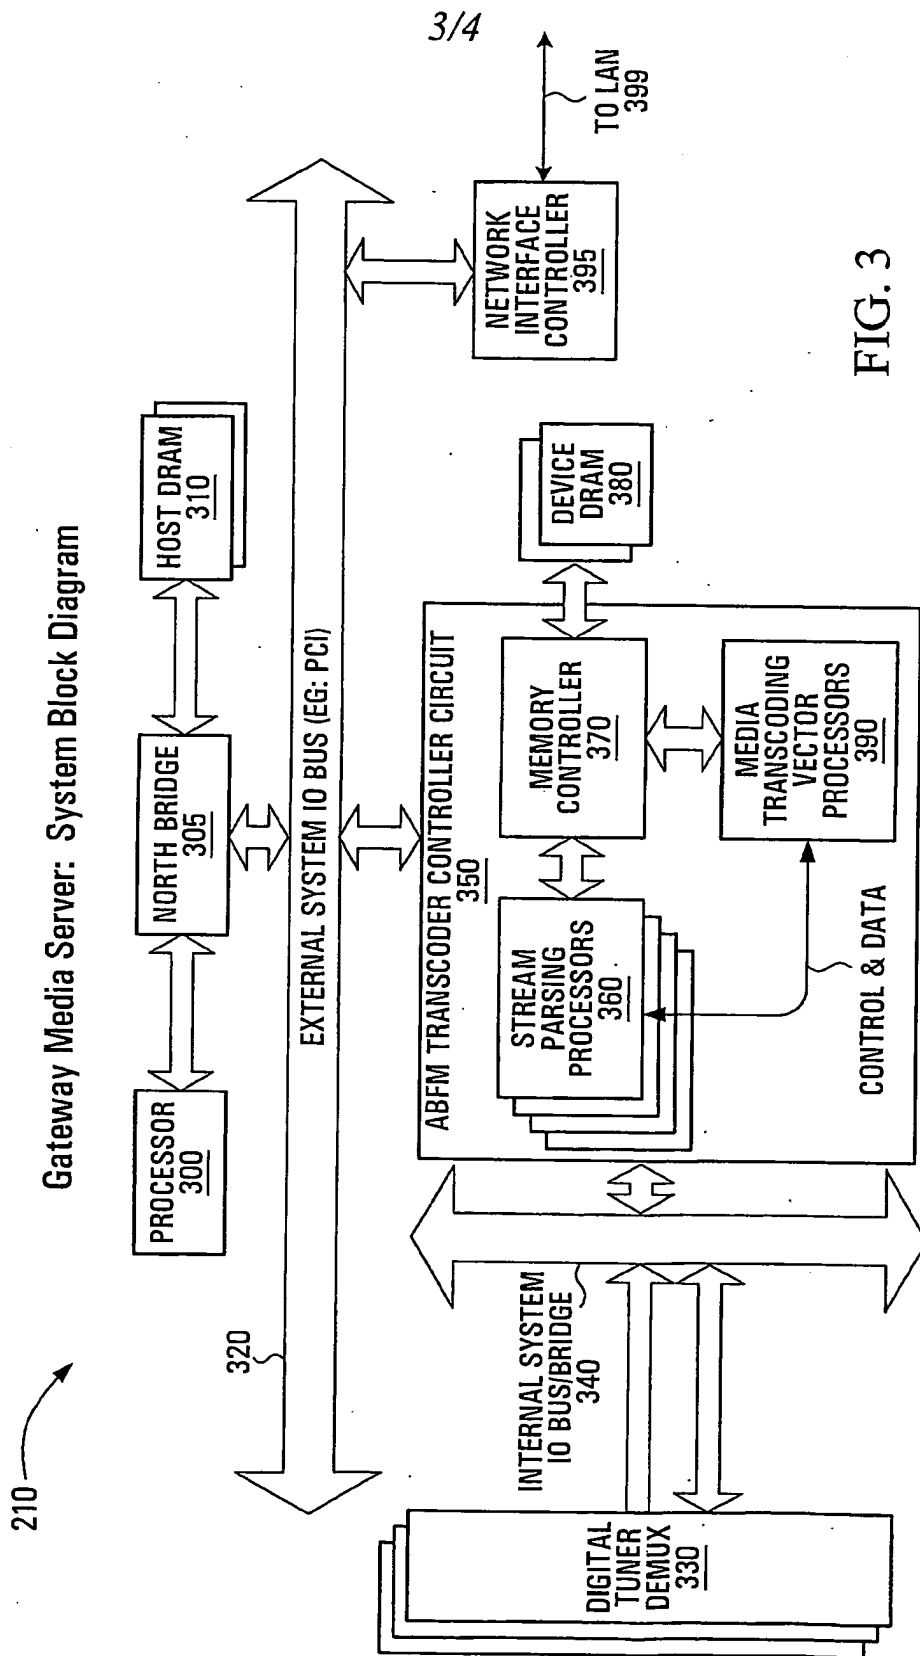

WO 02/080518

PCT/CA02/00436

4/4

## Receiver Client System Block Diagram

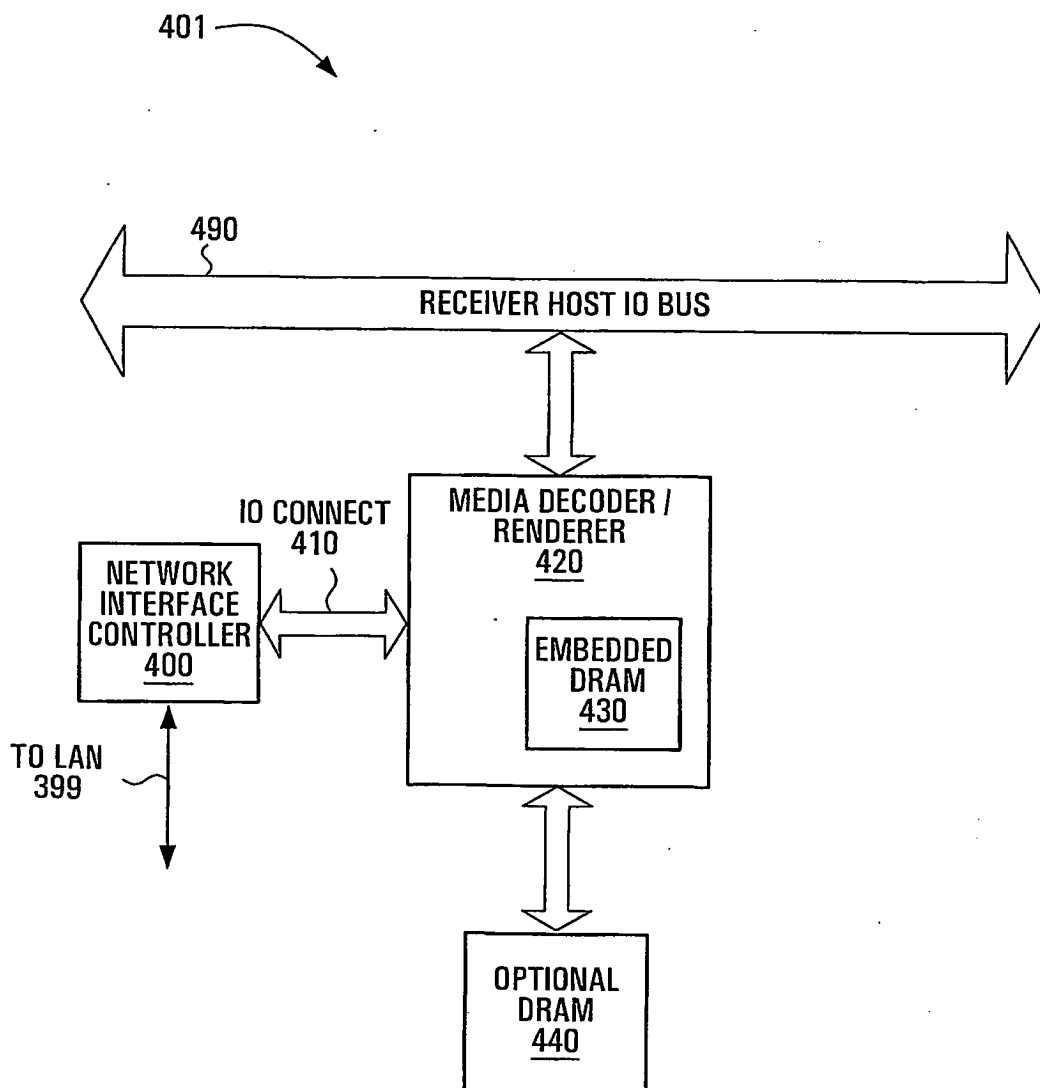


FIG. 4



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 October 2002 (10.10.2002)

PCT

(10) International Publication Number  
WO 02/080518 A3

(51) International Patent Classification<sup>7</sup>: H04N 7/24, 5/00

(74) Agent: SMART & BIGGAR; Attm: ZISCHKA, Matthew.  
438 University Avenue, Suite 1500, Box 111, Toronto, On-  
tario M5G 2K8 (CA).

(21) International Application Number: PCT/CA02/00436

(22) International Filing Date: 28 March 2002 (28.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/823,646 30 March 2001 (30.03.2001) US

(71) Applicant (for all designated States except US): VIXS  
SYSTEMS INC. [CA/CA]; 2235 Sheppard Avenue East,  
Suite 1705, Toronto, Ontario M2J 5B5 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LAKSONO, Indra  
[CA/CA]; 138 Old Hill Street, Richmond Hill, Ontario L4C  
9Z7 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR). OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).


Published:

with international search report

[Continued on next page]

(54) Title: ADAPTIVE BANDWIDTH SYSTEM AND METHOD FOR VIDEO TRANSMISSION

ABFM State Machine 3 step escalation

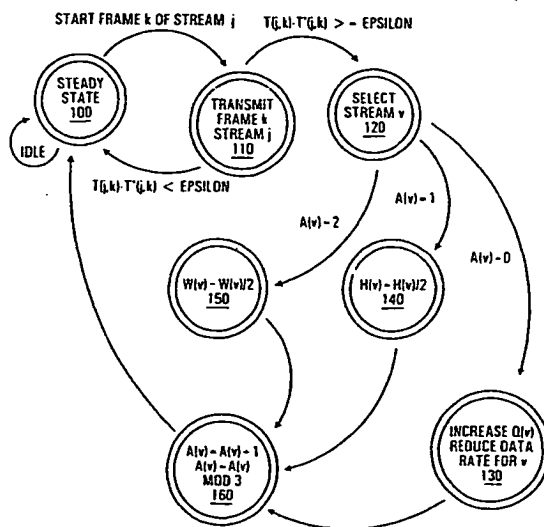

(57) Abstract: A system and a method for simultaneous transmission of multiple media streams in a fixed bandwidth network are disclosed herein. The system is comprised of a central gateway media server and a plurality of client receiver units. The input media streams arrive from an external source and are then transmitted to the client receiver units in a compressed format. A state machine on the gateway media server detects if the network bandwidth is close to saturation. In one embodiment, the potential bandwidth saturation is measured by matching the time when the start of unit of media for each stream against the estimated transmission time for that unit. When any one actual transmission time exceeds its estimated transmission time by a predetermined threshold value, the network is deemed to be close to saturation, or already saturated, and the state machine executes a process of selecting at least one stream as a target for lowering total bandwidth usage. Once the target stream associated with a client receiver unit is chosen, the amount of data transmitted by the target stream is reduced, which could result in a lower data transmission rate. In one embodiment, the amount of data is reduced by a gradual degradation of the precision of the data, resulting in a greater potential for data compression, and/or by gradually reducing the resolution of the data of the target stream.

WO 02/080518 A3



*before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**  
12 December 2002

## INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT/CA 02/00436

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04N7/24 H04N5/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, PAJ, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	RAMANUJAN R S ET AL: "Adaptive streaming of MPEG video over IP networks" LOCAL COMPUTER NETWORKS, 1997. PROCEEDINGS.; 22ND ANNUAL CONFERENCE ON MINNEAPOLIS, MN, USA 2-5 NOV. 1997, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 2 November 1997 (1997-11-02), pages 398-409, XP010252445 ISBN: 0-8186-8141-1	1-25, 33-37, 39-43
A	the whole document ----- -/-	26-32, 38
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *Z* document member of the same patent family		
Date of the actual completion of the international search  30 September 2002		Date of mailing of the international search report  09/10/2002
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  Fantini, F

## INTERNATIONAL SEARCH REPORT

Internat Application No  
PCT/CA 02/00436

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 014 694 A (AHARONI AMIR ET AL) 11 January 2000 (2000-01-11)  abstract column 1, line 45 - line 62 column 2, line 10 - line 53 column 3, line 8 - line 28 column 7, line 44 - column 8, line 17 column 10, line 21 - line 49	1-24, 33-37, 39-43
A	column 11, line 25 - column 12, line 10	25-32, 38
A	EP 0 901 285 A (MITSUBISHI ELECTRIC CORP) 10 March 1999 (1999-03-10) abstract page 4, line 31 - page 5, line 26 page 8, line 16 - line 45 page 13, line 7 - line 16 page 14, line 43 - line 50 figure 31	1-43
A	REJAIE R ET AL: "Architectural considerations for playback of quality adaptive video over the Internet" IEEE INTERNATIONAL CONFERENCE ON NETWORKS. ICON. PROCEEDINGS OF ICON, XX, XX, 5 September 2000 (2000-09-05), pages 204-209, XP002177090 the whole document	1-43
A	BOURAS C ET AL: "On-demand hypermedia/multimedia service over broadband networks" PROCEEDINGS OF THE INTERNATIONAL SYMPOSIUM OF HIGH PERFORMANCE DISTRIBUTED COMPUTING, XX, XX, 6 August 1996 (1996-08-06), pages 224-231, XP002180545 the whole document	1-43
A	EP 0 739 138 A (AT & T CORP) 23 October 1996 (1996-10-23)	

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

Internat Application No  
PCT/CA 02/00436

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6014694	A	11-01-2000	AU 7928998 A EP 0992160 A1 WO 9900984 A1 JP 2002511216 T	19-01-1999 12-04-2000 07-01-1999 09-04-2002
EP 0901285	A	10-03-1999	WO 9838798 A1 EP 0901285 A1	03-09-1998 10-03-1999
EP 0739138	A	23-10-1996	CA 2173881 A1 EP 0739138 A2 JP 8298464 A	20-10-1996 23-10-1996 12-11-1996

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**